


ANCHOR PLATE

Installation Instructions

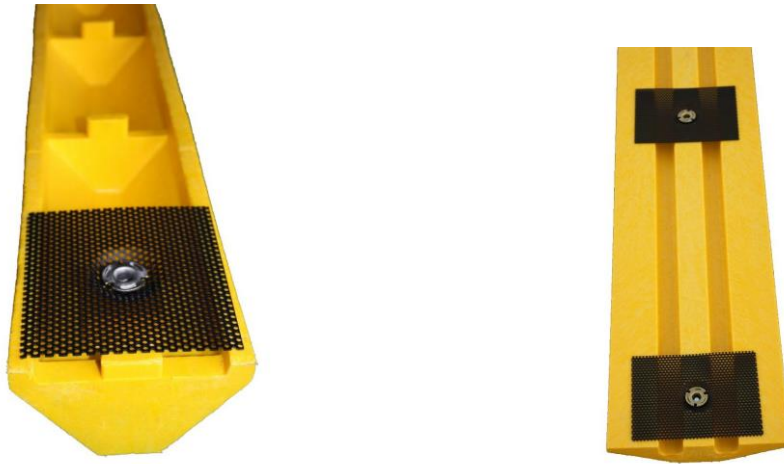

To Install:

- Mount directly onto **CONCRETE** surface only
Caution!! Not suitable for use on asphalt.
Installing on any surface other than concrete, will void the warranty!
- Make sure concrete surface is clean and dry
- Apply 2-3 oz. of two-part epoxy to the anchor plate
- Set into place
- Allow time to dry per epoxy instructions

Two-Part Epoxy Coverage Chart

(Based on optimal conditions, please use only as a reference)

Glue Down Wheel Stop QTY	Qty Epoxy Needed
0 – 9	1 (2-part quart system)
10 – 18	2 (2-part quart system)
19 – 27	3 (2-part quart system)
28 – 36	4 (2-part quart system)